


# MC040SLF

single phase cut out

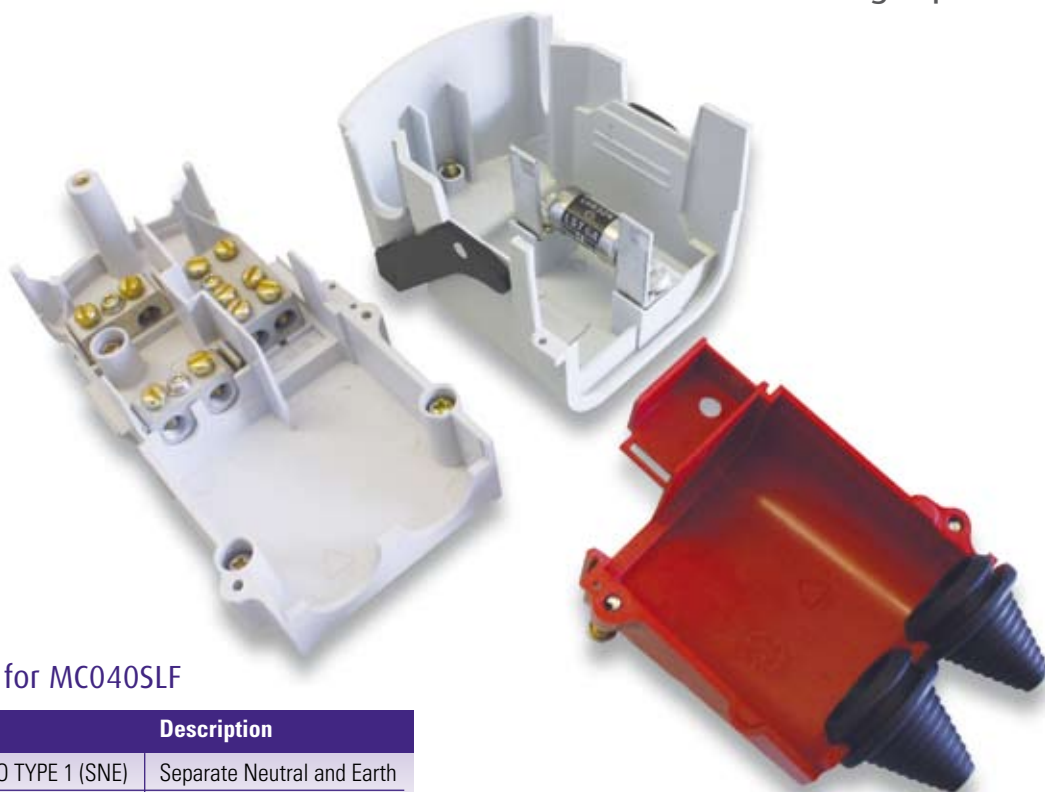

## Order details for MC040SLF

Order code	Description
MC040SLF 25A SLCO TYPE 1 (SNE)	Separate Neutral and Earth
MC040SLF 25A SLCO TYPE 2 (CNE)	Combined Neutral and Earth

Fuses to fit the MC040SLF are obtainable under the following part numbers:

LST2 AMP	LST10 AMP	LST25 AMP
LST4 AMP	LST16 AMP	
LST6 AMP	LST20 AMP	

## Specification

Designed and tested in accordance with BS 7654:1997  
 25A maximum fuse rating  
 Accepts fuse links to BS 88 Part 1, AC 16 tag type  
 IP22 rating  
 Single Pole isolation  
 Single fuse  
 Electroplated brass terminals with serrated bores  
 Maximum cable size; 16mm<sup>2</sup> stranded copper or 25mm<sup>2</sup> solid aluminium conductors

Cable entry via PVC grommets as standard

Outgoing cables exit below horizontal to form drip loop

Sealing wire facility

## Dimensions

Height 150mm  
 Width 76mm  
 Depth 60mm



LST fuse