westminster

retractable power pillars from the Castle Range





Additional important advantages include;

- · Completely flush top surface when not in use
- · Recess in cover to receive matching floor infill
- Electrical components sealed to IP 67/68
- Automatic power disconnection when unit is folded away
- · Custom versions available to order


westminster


selection chart



Overall dimensions (mm)

	Outgoing ways	
	2	4
Length (L)	785	915
Width	455	455
Tub height	295	295
Raised height (H)	547	677
Raised width	237	237

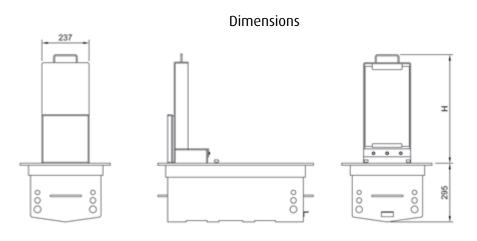



Specification

5mm/10mm galvanised steel construction

Long life stainless steel wedge lock and hinges

Electrical components protected to IP67/68

18mm thick treated exterior grade plywood backboard

Pre-drilled cable entries

Hinged stainless steel lock cover

Stainless steel anti-vermin mesh

Door seal

20mm deep recess in cover for infill medium

Gas strut assisted lid

All components fully earth bonded

Bolted construction for easy panel replacement in case of damage

110/230/400V a.c. variants Weight: Approximately 91kgs

Fasthia a saat

Options

Stainless steel construction

Painted or powder coated to RAL colour of Customer's choice

Digital or solar timer controlled supply

Possibility to integrate Smart Metering facilities

Earthing mat

