


MC040DN Fuse Unit


Double Pole



Retaining features such as cam lever extraction and red terminal safety shields from the other Lucy Lighting cut outs, the double pole fuse unit offers extreme compactness where the available space is small. With its 25A rating, the unit is a useful adjunct to the range of cut outs.



Dimensions
 Height 70mm
 Width 57mm
 Depth 53mm

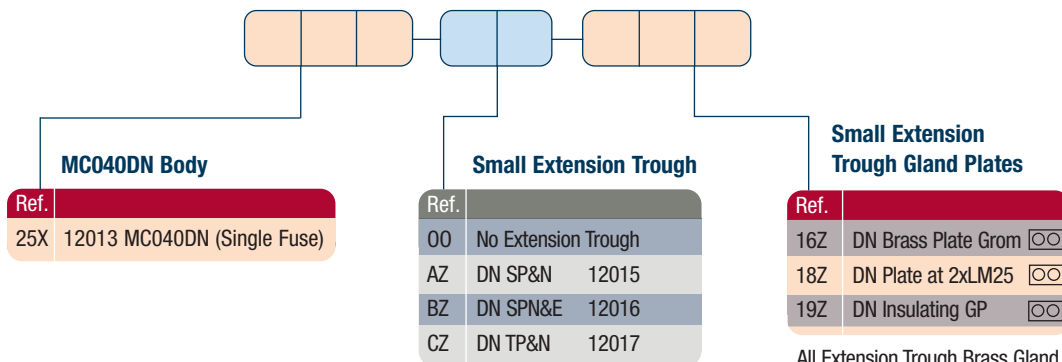

All Extension Trough Brass Gland Plates are fitted with an Earth Stud

Specification

Designed and tested to BS 7654: 1997

Accepts fuse links to BS 88, LST type (See page 17 for details)

Suitable for 72mm wide lighting columns to BS 5649

IP 42 rating, cover in place

IP 21 rating, cover removed

Outgoing cables exit below horizontal to form drip loop

Electroplated brass terminals with serrated bores accept up to 16mm² stranded copper or 25mm² solid aluminium conductors


Sealing wire facility

Red safety shield over incoming terminals

Tunnel or stud terminal option

Brass gland plate fitted with earth stud and either brass tubes or holes filled with grommets

Optional cable extension trough ref.CZ

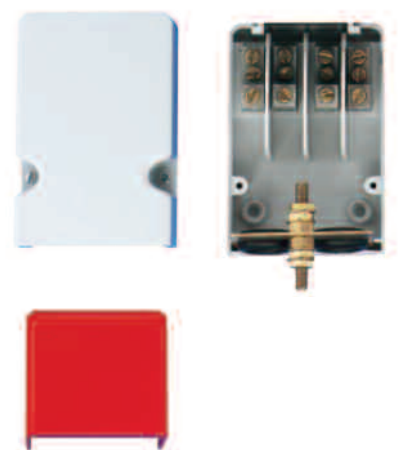

Small cable Extension Trough CZ

Height 100mm
 Width 68mm
 Depth 48mm